

## 2151E 21.5" LCD True-Flat Open-frame Touchmonitors

### PRODUCT OVERVIEW

## Features


- Three year standard warranty
- High quality panel with 178° x 178° viewing angle
- Multilingual on-screen display (OSD)
- LED Backlight and High Resolution 1920\*1080
- Mounting options including rear-mount and VESA mount
- Projected Capacitive Touch Technology
- 3000:1 contrast ratio, and 250-nit brightness (LCD panel)
- Fully RoHS compliant
- Optional front mount and rack mount bezels
- Zero-bezel multi-touch screen

## Applications

- Countertop kiosk information systems
- Point-of-sale (POS)
- Gaming and amusement
- Point-of-information

## Accessories

- Power Cord (US, EU or UK type)
- USB or COM Cable Optional
- Power Brick
- VGA Cable & HDMI or DVI Cable Optional
- User Manual (English only)

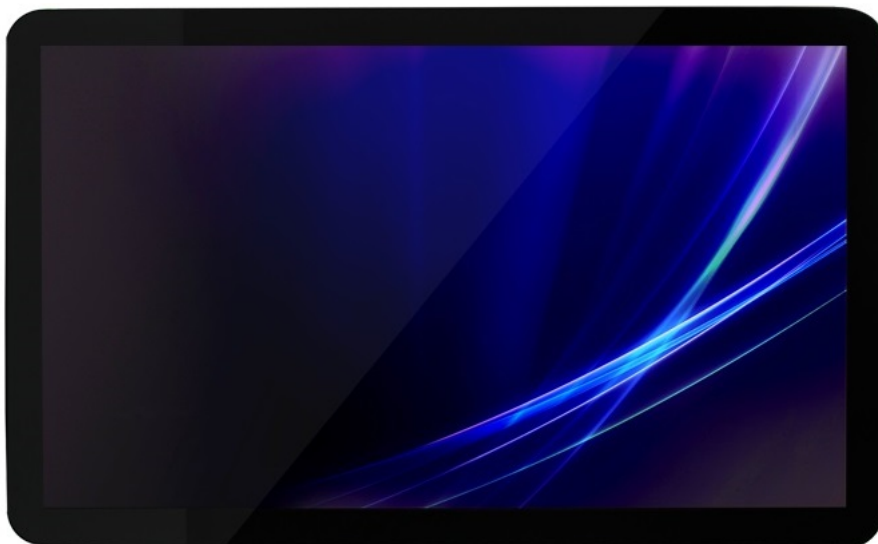

## 2151E 21.5" True-Flat LCD Open-frame Touchmonitors

### SPECIFICATION

Model	2151E-OT-F	
Case/Bezel Color	Black\white	
Display Size	21.5"	
Touch panel	Projected Capacitive Touch Screen	
Touch points	10	
Touch response time	8ms	
Touchmonitors Dimensions	524 x 45.8 x 315.5 mm	
LCD Type	TFT LCD(LED backlight)	
Useful Screen Area	477.8 mm x 269.3 mm	
Aspect ratio	16:9	
Optimal (native) Resolution	1920*1080	
LCD panel Pixel pitch	0.1875 x 0.1875 mm	
LCD panel Colors	16.7 million	
LCD panel Brightness	250 cd/m2(customized upto 1000 cd/m2 optional)	
LCD panel Response Time	25 ms	
Viewing Angle (typical, from	Horizontal	±89° or 178° total
	Vertical	±89° or 178° total
Contrast Ratio	3000:1	
Input Video signal connector	Mini D-Sub 15-Pin VGA type and HDMI type or DVI type optional	
Input Touch signal connector	USB or COM (optional)	
Power Supply Type	Monitor input interface: +12VDC ±5%,4.0 A; DC Jack (2.5 ϕ)	
	AC to DC power brick input: 100-240 VAC, 50/60 Hz	
	Power Consumption: 30W	
On-screen display(OSD)	Controls(back): Power\Menu\Up\Down\Auto; Settings: Contrast, Brightness, H/V position; RGB(color temp),Clock, Phase, Recall; Languages: English, German, French ,Spanish, Japanese, Italy, Chinese;	
Temperature	Operating: 0°C to 40°C ;Storage -20°C to 60°C	
Humidity (non-condensing)	Operating: 20%-80%; Storage: 10%-90%	
Shipping Carton Dimensions	616 x 206 x 456 mm (2 PCS)	
Weight (approx.)	Actual: 5.8 kg ;Shipping: 14.2 kg(2 PCS)	
Warranty Monitor	3 years(Except for LCD panel 1 year)	
	Backlight lamp life: typical 50,000 hours to half brightness	
Agency Approvals	CE FCC RoHS (UL or GS for Customized)	
Mounting Options	75 mm and 100 mm VESA mount	

## 2151E 21.5" True-Flat LCD Open-frame Touchmonitors

### DRAWINGS

